

Ride-On 5-Gang Reel Fairway Mower  
**SR888/SR525A**

**SHIBAURA**

Advanced dynamics, Technical simplicity



**IHI**



SHIBAURA'S SR888/SR525 fairway mower has gained an enviable reputation in many countries since its debut. Manufactured to exacting standards in Japan and powered by SHIBAURA's diesel engine, SR888/SR525 will give years of durable service.




**SR525A-S**

Width of cut : 2500mm



"I am delighted to tell you that the machine has proven 100% reliable and all the staff enjoy using it because of its simple set up arrangement, as you know ours is a very hilly course and previous fairway mowers struggled under load but the Shibauro doesn't miss a beat."

— P. Lewis, Course Superintendent, IRELAND

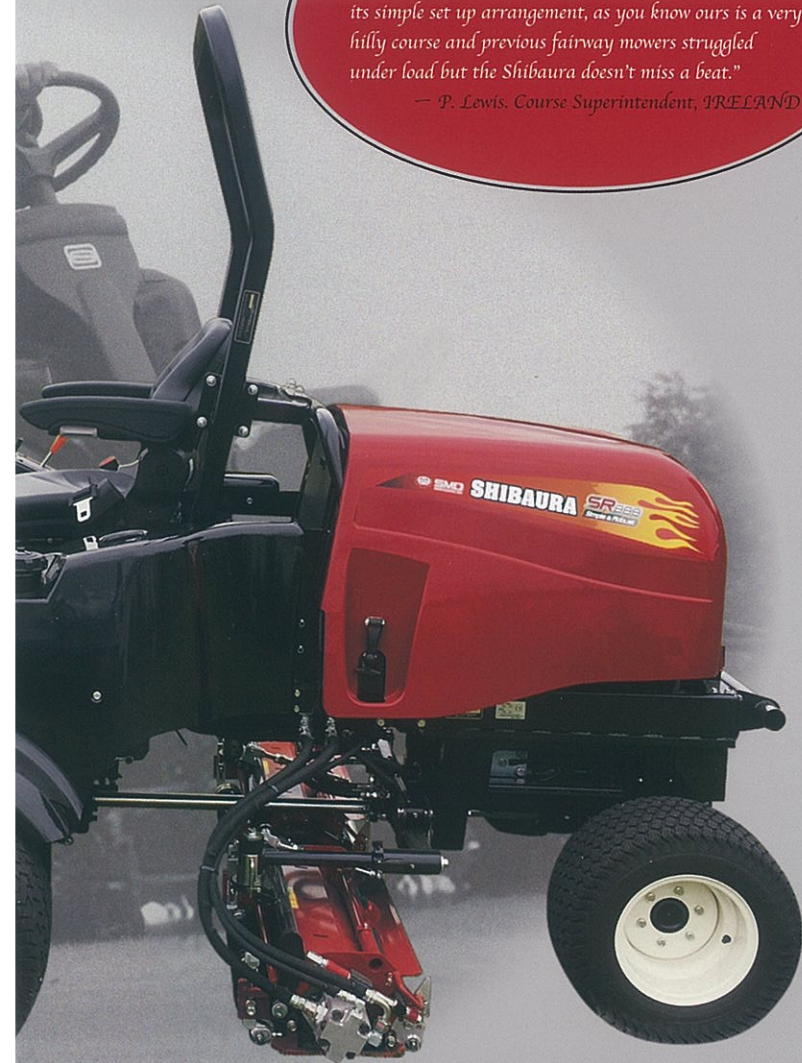

**SR888**

Width of cut : 2500/2800mm

**Operator Comfort**



Excellent visibility to cutting reels.



Tilting Steering Wheel

Adjustable Suspension Seat

Reclining Seat

Sliding Seat

Adjustable suspension seat, reclining seat back and tilt adjustment ensures operator comfort.



Shibauro excellent bed knives and reels can use 3 times longer than others



Adopt new protection sleeves (F6 heavy), protect hose from abrasion



Key switch, throttle lever and lift /down lever, locate on right armrest



New CE certificated ROPS, ensure driver's safety more

**Optimum Accessibility for Daily Inspection**



Access to all major components is made simple with tilting operators seat/platform and full bonnet opening. Radiator can be cleaned easily by opening the front screen and retractable shutter.

**Low Emission SHIBAURA Diesel Engine**



Choice of 3 or 4 cylinder SHIBAURA diesel engines, complying with Tier 3 US emission regulations.

**Easy Operation**



Ergonomically designed controller and indicators, ease to access, improve visibility and comfortable to operator.

**Diverter Valve**



All cutting units are fitted with diverter valves enabling the back lap of individual units.

**Easy Adjustment of Cutting Height**





## Options

### Canopy and Protective Net



### Grass Collector



### Scraper



## Specifications

| MODEL                | SR888-S                                                                                     |      | SR888-W                                 |                   | SR525A-S                             |
|----------------------|---------------------------------------------------------------------------------------------|------|-----------------------------------------|-------------------|--------------------------------------|
| <b>Dimensions</b>    |                                                                                             |      |                                         |                   |                                      |
| Length               | 2750                                                                                        |      | 2780                                    |                   | 2700                                 |
| Width                | Mowing                                                                                      | mm   | 2870                                    |                   | 2900                                 |
|                      | Transport                                                                                   | mm   | 2195                                    |                   | 2240                                 |
| Height               | mm                                                                                          |      | 2100(include ROPS)                      |                   | 2040(include ROPS)                   |
| Wheel Base           | mm                                                                                          |      | 1600                                    |                   | 1510                                 |
| Tread Width          | mm                                                                                          |      | 1730                                    |                   | 1730                                 |
|                      | mm                                                                                          |      | 1150                                    |                   | 1045                                 |
| Ground Clearance     | mm                                                                                          |      | 160                                     |                   | 160                                  |
| Tires                | Front                                                                                       | mm   | 24x13.00-12 4PR                         |                   | 24x13.00-12 4PR                      |
|                      | Rear                                                                                        | mm   | 20x10.00-10 4PR                         |                   | 20x8.00-10 6PR                       |
| Weight               | kg                                                                                          |      | 1590                                    |                   | 1680                                 |
| <b>Engine</b>        |                                                                                             |      |                                         |                   |                                      |
| Model                | SHIBAURA N844L                                                                              |      | SHIBAURA N844L                          |                   | SHIBAURA N843L                       |
| Type                 | Water-cooled 4 cycle diesel                                                                 |      |                                         |                   |                                      |
| Cylinders            | 4                                                                                           |      | 3                                       |                   | 3                                    |
| Displacement         | cc                                                                                          |      | 2216                                    |                   | 1662                                 |
| Horsepower           | kW(PS)/rpm                                                                                  |      | 33.1(45)/2700                           |                   | 27.9(38)/2850                        |
| Fuel Tank Capacity   | ℓ                                                                                           |      | 43                                      |                   | 41                                   |
| Battery              | 75D26L                                                                                      |      |                                         |                   |                                      |
| <b>Transmission</b>  |                                                                                             |      |                                         |                   |                                      |
| Drive                | Hydrostic Transmission, 2 range High/Low Automatic 4-Wheel Drive or Permanent 4 Wheel Drive |      |                                         |                   |                                      |
| Brake                | Wet multiple Disk                                                                           |      | Wet multiple Disk                       |                   | Wet multiple Disk                    |
| Steering             | Hydraulit Power Steering                                                                    |      |                                         |                   |                                      |
| Traveling Range      | Forward                                                                                     | 2    |                                         | 2                 |                                      |
|                      | Reverse                                                                                     | 2    |                                         | 2                 |                                      |
| Traveling Speed      | Forward                                                                                     | km/h | L:0~11.8 H:0~17.1                       | L:0~11.8 H:0~17.1 | L:0~11.8 H:0~17.1                    |
|                      | Reverse                                                                                     | km/h | L:0~8.3 H:0~11.9                        | L:0~8.3 H:0~11.9  | L:0~8.3 H:0~11.9                     |
| <b>Reel Mower</b>    |                                                                                             |      |                                         |                   |                                      |
| Total Width of Cut   | mm                                                                                          |      | 2500                                    |                   | 2800                                 |
| Reel Diameter        | mm                                                                                          |      | Ø 178                                   |                   | Ø 178                                |
| Number of Reel       | 7/9/11                                                                                      |      | 5/7/9                                   |                   | 9Blade-Standerd(7/11 Blade-optional) |
| Height of Cut        | mm                                                                                          |      | 7~30(7/9/11)                            |                   | 7~60(7/9)、10~60(5)                   |
| Mowing Rate          | a/h                                                                                         |      | 183(Mowing Speed 9km/h, Efficiency 0.8) |                   | 7~30                                 |
| <b>Other</b>         |                                                                                             |      |                                         |                   |                                      |
| Rops                 | ISO 21299:2009                                                                              |      | 2 places                                |                   | No standard                          |
| Cup holder           | 2 places                                                                                    |      | Right side                              |                   | -                                    |
| Operation board      | Deluxe type                                                                                 |      | Standard type                           |                   | -                                    |
| Sheet                | Deluxe type                                                                                 |      | Standard type                           |                   | -                                    |
| <b>Option</b>        |                                                                                             |      |                                         |                   |                                      |
| Roof                 | ○                                                                                           |      | ○                                       |                   | ○                                    |
| Operator Protect Net | ○                                                                                           |      | ○                                       |                   | ○                                    |
| Grass Bucket         | ○                                                                                           |      | ○                                       |                   | ○                                    |
| Scraper              | ○                                                                                           |      | ○                                       |                   | ○                                    |

### Important information

●Improper use of any product may cause serious or fatal injury. Read carefully the operating and safety instructions in your owner's manual before use.

※We reserve the right to discontinue models or change specifications without notice.

 **SHIBAURA**

IHI Agri-Tech Corporation

GENERAL CONTACT ; dept2@iat.ihigrp.co.jp

URL:http://www.ihico.jp/iat/en/

OVS-GRN2-1809-SZX-20