

Specifications

| Items | Model | Unit | MGR2220 | MGR2630 |
|--------------------------------|-------|-------------|---------------|-----------------|
| Working width | | | | |
| Tedding | | cm | 150 | 175 |
| Raking | | cm | 220 | 260 |
| Working speed | | | | |
| Tedding | | km/hr | 5~8 | 5~8 |
| Raking | | km/hr | 4~8 | 4~8 |
| Working capacity | | | | |
| Tedding | | Ton/hr | 55~85 | 65~100 |
| Raking | | Ton/hr | 70~130 | 80~155 |
| Overall dimensions | | | | |
| Length | | cm | 195 | 220 |
| Width | | cm | 220 (170) | 260 (135) |
| Height | | cm | 95 | 105 |
| Weight | | kg | 125 | 155 |
| Required Tractor Power | | | | |
| Power | | kW (PS) | 11~26 (15~35) | 13~29.5 (18~40) |
| Number of arms / rotors | | | | |
| | | pcs / rotor | 4 / 8 | 6 / 12 |
| Tire size | | | | |
| | | PR | 13x5.00-6-4 | 13x5.00-6-4 |
| Connection/Others | | | | |
| | | ○ | ○ | ○ |
| 2P Pin Category | | Category I | Category I | Category I |
| PTO shaft speed | | r.p.m. | 350~540 | 350~540 |

○ = STANDARD

Remarks : Working capacity subject to change depending on the type and/or moisture content of material.
Figures, technical data, dimensions and weights are subject to change without notice.

ROTARY HAY MAKER

MODEL: MGR2220/ 2630



IHI Agri-Tech Corporation

1061-2 Kamiosatsu, Chitose, Hokkaido, 066-8555, Japan

TEL : 81-123-26-2210

FAX : 81-123-26-2412

<http://www.ihico.jp/iat/en/>

<http://www.ihico.jp/iat/en/>



Tedding and raking by compact body

Best partner for STAR Square Baler and Round Baler



Multiple operation (Tedding, Raking & Spreading) at compact body

Our Rotary hay makers have big advantage as to economical operation such as less fuel consumption, multiple functions (3 in one) at compact body etc. The compact body and light weight models are operated under 40hp tractor. MGR2220/2630 demonstrate good performance from this body all in raking, tedding and spreading in small fields. Furthermore, thin and flexible steel tines make gentle treatment of grass increase the nutritional quality of hay and forage. The stable operation is enable because of wide tread.



Adjustment of wheel height

Simply by changing the pin position always makes wheel height keep the best position on every fields or operations.




Special feature only for MGR2630

1. Auto-swing swivel hitch
Auto-swing swivel hitch makes the machine follow a tractor track flexibly at a corner. As a result, raking quality is uniform even around corners. (The picture below watched from right above.)



Setting operation mode

Operation like Raking, Tedding and Spreading and transportation mode are selected by putting an iron bar in one of the holes.

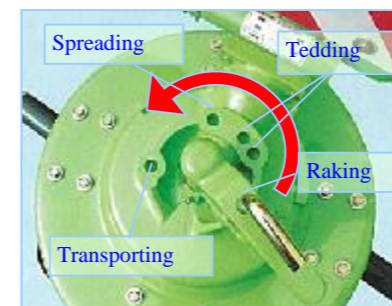

2. Detachable tine arms
For transport, MGR2630 has removable tine arms that are stored at the front frame.

